



ATS Static Transfer Switch 16A/32A




For 19" rack cabinet

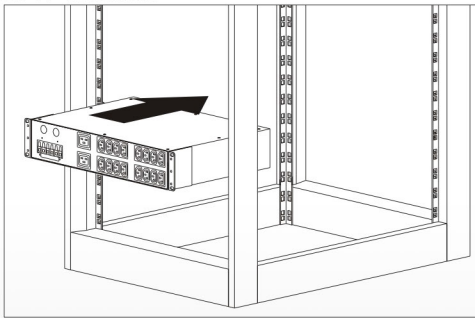

Applications



LCD Display



The digital LCD display shows input/output power connected to load

Specifications


- Uninterruptible transfer between 2 independent sources
- Can be powered by 2 different UPS and power sources
- Can be used as external maintenance bypass
- LCD and LED display
- For 19" rack cabinet
- Redundant power supply
- Intelligent communication interface through RS-232, USB and 5 dry contacts
- Flexibility to use
- Input voltage : 200/208/220/230/240Vac (+/-5%/10%/15%/20%)
- Input voltage range : 150Vac~300Vac
- Input frequency : 50/60Hz(+/-5%/10%/15%/20%)
- Input current : 16A or 32A
- Output voltage : 200/208/220/230/240Vac
- Electronic circuit protection
- Transfer time : 8~12ms (typical)
- Efficiency : 99% (with full linear load)
- Standard : EN62310-2
- 2 years warranty

Version 16A (1U)

Front 16A (1U)



Back 16A (1U)



Output 3
Maximum 16A

Output 2
Maximum 10A

Output 1
Maximum 10A

Version 32A (2U)

