

Protect Basic (RACK) 2000 VA



Applications



The best quality/price ratio



Protect Basic Rack is an ideal solution for small server IT 19" Racks. Thanks to its small depth, the UPS can fit in almost any 19" cabinets.

Specifications

- Line-interactive technology (VI)
- Microprocessor control guarantees high reliability
- Auto restart while AC is recovering
- Simulated sine wave output
- Off-mode charging
- Transfer to battery at under- and overvoltage
- UPS with intelligent LCD display
- Automatic computer shutdown
- Automatic Voltage Regulator (AVR, "Boost and Buck")
- Very wide input and voltage range
- Battery (DC) cold start
- Overload and short circuit protection
- Audible and visible alarm
- USB interface including software
- 2 years warranty

LCD display indicator

The multi-functional indicator operates with blue backlight LCD and shows all input, output, load and battery parameters.

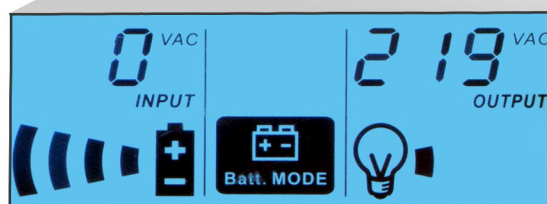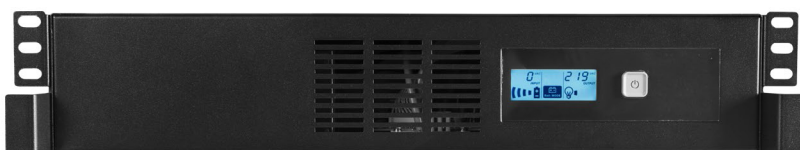

800VA



1000VA



2000VA



Smart USB



It offers real-time power and UPS status monitoring with automatic or scheduled shutdown and many other advanced power management functions.

Monitoring Software Included



Monitoring software for Windows, Mac, Linux included.

Protect Basic (RACK)	Model		
	800VA	1000VA	2000VA
Power (Watt)	480W	600W	1200W
Input voltage	220/230/240 Vac		
Input voltage range	162-290 Vac		
Output voltage regulation	+/- 10%		
Transfer time	Typical 2-6 ms, 10 ms max.		
Waveform	Simulated sine wave		
Type & number of battery	12V/9Ah x1	12V/7Ah x2	12V/9Ah x2
Battery charging time	4-6 hours recover to 90% capacity		
Humidity	0-90% RH at 0-40°C (non-condensing)		
Noise level	Less than 40dB		
USB	Supports Windows family, Linux, Unix and MAC		
Dimensions (DxWxH), mm	230x438x86	300x438x86	300x438x86
Weight, kg	7,7	11,3	14,4